



Impasto — Uf Select®




733-00613 Ice Storm



733-60973 Almond Milk

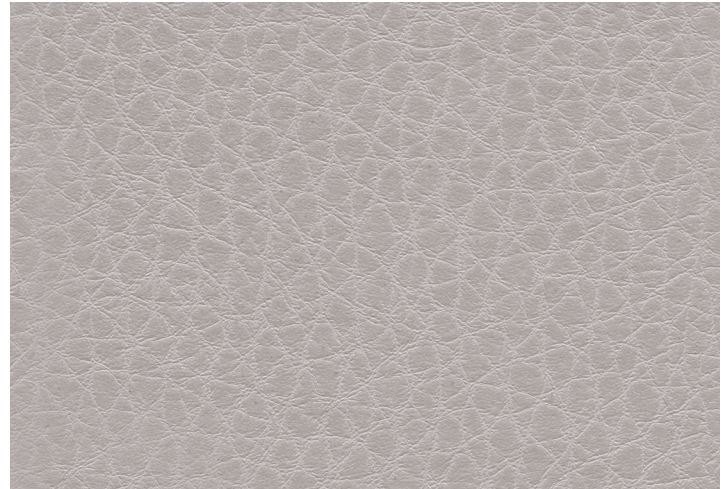


733-60943 Arctic Fox



733-53513 Incense




733-35143 Snickerdoodle




733-58843 Thunder



733-73313 Golden Ochre



733-82683 Roasted Squash




733-27743 Bristle Blue



733-43553 Light Moss



733-34673 Tofu



733-33903 Amberglow




733-14263 Mahogany Red



733-27853 Deepwell




733-43393 Avocado



733-33853 Caribou



733-33343 Tiger Eye



733-14413 Firecracker



733-26053 Nocturne Blue



733-43563 Pine Needle




733-60983 Black Spinel



733-34863 Pumpernickel



733-93543 Kalamata



733-43403 Bay Leaf



733-72373 Genesis

Impasto — Uf Select®

Application

Interior Upholstery

General Specifications

Composition	Polycarbonate Blended Surface 65% Polyester, 35% Cotton Backing
Weight	Approx. 12.53 oz. Per Square Yard Approx. 425 Grams Per Square Metre
Thickness	Approx. 0.95 Millimetres
Width	54 Inches 137 Centimetres
Repeat	None

Performance

Abrasion	ASTM D4157 / 200,000 Double Rubs (Wyzenbeek)* BS EN ISO 12947-2 / 150,000 Rubs (Martindale)* *meets or exceeds
Hydrolysis	10 Weeks ASTM D3690 Sect. 6.11 (Hydrolytic Stability) ISO 1419 Method C (Accelerated Ageing)
Adhesion of Coating	ASTM D751
Tear Strength	ASTM D2261
Breaking Strength	ASTM D751
Tensile Strength	BS EN ISO 1421

Colorfastness

Light	AATCC 16.3, 200 Hours, Grade 4 ISO 105 B02, Grade 6
Crocking	AATCC 8, Grade 4-5 Wet & Dry

Flammability Requirements

ASTM E84 (Adhered) - Class A | CA TB 117-2013 - Pass | FMVSS 302 - Pass | NFPA 260 - Class 1 | UFAC - Class 1

For more information on our fabrics, cleaning and care instructions, please visit our website.

[ultrafabricsinc.com](https://www.ultrafabricsinc.com)

Ultrafabrics® and logo, and Uf Select® are registered trademarks of Ultrafabrics Inc. Made in Mexico.

