

LOOM

GENERAL SPECIFICATIONS

Width	54.5"
Weight	17.504 oz / linear yard
Composition	Surface: 65.86% Polyester, 25.59% Pre-Crcotn, 8.55% PCR Polyester Backing: Light Acrylic
Direction	Railroaded
Repeat	0.250" H x 0.250" V
Finish	PFAS - Free Stain Resistance

FLAME RETARDANCY SPECIFICATIONS

CAL-TB 117-2013	Passes
NFPA 260	Passes
UFAC Class 1	Passes

PERFORMANCE SPECIFICATIONS

Abrasion	63,000 DR
Colorfastness to Crocking	Wet: 3 Dry: 4
Seam Slippage	Fill: 58 Warp: 53
Tear Strength	Fill: 16 Warp: 20
Colorfastness to Light	Class 4 at 40 hours
Cleaning Code	S
Brush Pill	Class 3

CLEANING INSTRUCTIONS

Clean with dry cleaning solvent only, not water. Never over-saturate the material with the solvent as damage can occur. If it is a pile fabric, it will need to be brushed after cleaning to restore its natural appearance.

REDUCED ENVIRONMENTAL IMPACT

This product does not pose any exposure risks associated with the chemical in Prop 65

No added flame retardant chemicals

No added anti-bacterial / anti-microbial chemicals

Lead / Heavy metal free


BPA free / Tris free / Formaldehyde free

Does not contain conflict minerals

PFAS Free

*Prop 65 Compliant

*CAB2998 Compliant

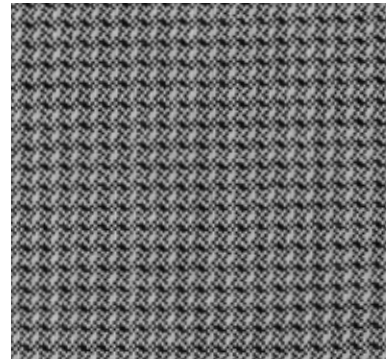

LOOM REPEAT

RECOMMENDED APPLICATIONS



HOSPITALITY



RESTAURANT



WORKSPACE



SENIOR LIVING



*ACT® Registered Certification Marks