



SUSSEX

GENERAL SPECIFICATIONS

Width	54.875"
Weight	17.68 oz / linear yard
Composition	54% Polyester, 46% Olefin
Railroaded	No
Repeat	0.813" H x 0.688" V
Finish	PFAS-Free Stain Resistance

FLAME RETARDANCY SPECIFICATIONS

CAL-TB 117-2013	Passes
NFPA 260	Passes
UFAC Class 1	Passes

PERFORMANCE SPECIFICATIONS

Abrasion	51,000 DR
Colorfastness to Crocking	Wet: 3 Dry: 4
Seam Slippage	Fill: 108 Warp: 93
Tear Strength	Fill: 71 Warp: 42
Colorfastness to Light	Class 4 at 40 hours
Cleaning Code	WS, BC
Brush Pill	Class 5
Bleach Cleanable	Yes

CLEANING INSTRUCTIONS

Spot clean with upholstery shampoo, foam from a mild detergent, or a mild dry cleaning solvent. Pile fabrics may require brushing to restore appearance. Cushion cover should not be removed and dry cleaned. BC - Lightly spray with a 10% dilution of household bleach and water. After the appropriate contact time, blot surface dry and wipe or rinse with fresh water and blot dry.

REDUCED ENVIRONMENTAL IMPACT

This product does not pose any exposure risks associated with the chemical in Prop 65.

No added flame retardant chemicals

No added anti-bacterial / anti-microbial chemicals

Lead / Heavy metal free


BPA free / Tris free / Formaldehyde free

Does not contain conflict minerals

PFAS Free

*Prop 65 Compliant
*CAB2998 Compliant

RECOMMENDED APPLICATIONS

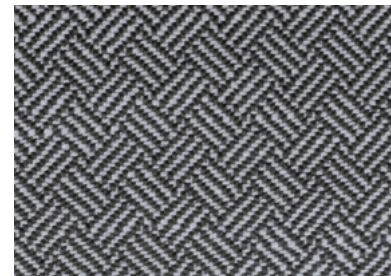

*ACT® Registered Certification Marks